

iLED-F0.9COB-GA

Vistrol Gaia Series COB LED Fine Pitch Display Panel



The iLED-F0.9COB-GA features cutting-edge COB (Chip-on-Board) technology offering the best in image quality, durability, and versatility.

Features

- Visual Brilliance**
 COB LED displays redefine visual excellence. By integrating LED chips directly on the board, they deliver unmatched image quality and clarity, ensuring your content shines brilliantly.
- Seamless Design**
 Say goodbye to bezels and gaps. COB technology enables ultra-compact, borderless displays, providing a more immersive viewing experience.
- Exceptional Durability**
 Built to last, COB LED displays are robust and reliable.
- Energy Efficiency**
 Enjoy energy savings without compromising on brightness. COB displays are highly efficient, reducing power consumption while maintaining vivid visuals.
- Versatile Applications**
 From the control room to the meeting room, COB LED displays find their place everywhere. Their flexibility in size, shape, and resolution makes them suitable for various industries and purposes.



✓ Flip Chip

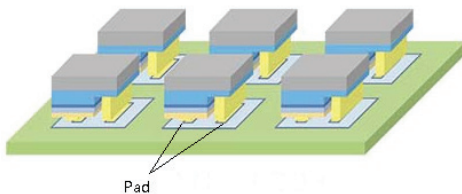


- No Wire Bonding
- High Contrast Ratio
- Blacker and Better Display Effect

✓ Anti Collision and Easy Cleaning



Vistrol COB
 After Collision Test
 (>10kg, ~1m Height)



SMD
 After Collision Test
 (>10kg, ~1m Height)




Easy to Clean with Water

✓Extremely Low Pixel Failure Rate



Vistrol COB
(<10PPM)



SMD
(>50PPM)

✓Technical Specifications

LED MODULE	
Model Number	iLED-F0.9COB-F3-GA
Pixel Pitch (mm)	0.93
LED Type	COB 1R1G1B (Flip Chip)
Module Size (mm)	300 x 337.5mm
Module Pixel Density	320 x 360dots
Module Weight (kg)	1.15kg
LED PANEL	
Cabinet Size WxHxD(mm)	600 x 337.5 x 40mm
Pixel Density	640 x 360 dots
Material	Die casting aluminum
Cabinet Weight (kg)	5.7kg
Viewing Angle H°/V°	160°/140°
PHOTOELECTRONIC PARAMETERS	
Brightness (nit)	800 cd/m ²
Greyscale	13bits
Refresh Rate (hz)	3840hz
Color Temperature (K)	3200~9300K
APPLICATION	
AC Operating Voltage	100~240 V
AC Input Frequency	50/ 60 Hz
Power Consumption (Max./Avg.)	275 W/m ²
Storage Temperature (°C)	-40~+60 °C
Operating Temperature(°C)	-10~+40 °C
Storage Humidity (RH)	10%~90%
Operating Humidity (RH)	10%~90%
IP Rating (Front/Rear)	IP30/IP30
Panel Maintenance Type	Front Maintenance
Panel Installation Type	Front Installation
Redundant Power Supply	Optional
Certificate	CE, RoHS, FCC

Vistrol

Singapore | Malaysia

w www.vistrol.com
e sales@vistrol.com

ISO 9001:2005 Certified Company:



* For any enquiry , please send email to sales@vistrol.com

R01 -V1.9